

Sumitomo Electric Industries, Ltd.

Part No.: SPV3210 Series

Document No.: HUW0424106-01C

Date of issue: February 29, 2008



Technical Specification
of
Long Wavelength PIN Photodiode Module
for Wide Frequency-range CATV Receiver

SPV3210 Series

RoHS Compliant



1. General

SPV3210 Series are InGaAs/InP PIN photodiode modules designed for fiber optic CATV receiver and other high-speed analog receiver. These modules have low inter-modulation distortion and high responsivity at 1310nm and 1550nm, and are ideally suitable for wide frequency range receiver up to 860MHz.

A photodiode is mounted into a low capacitance coaxial package integrated with a single mode fiber pigtail.

2. Package dimension and pin assignment

(See attached appendix.)

3. Absolute maximum ratings

Parameter	Symbol	Ratings	Unit
Storage temperature	Tstg	-40~+85	°C
Operating case temperature	Top	-40~+85	°C
Reverse voltage	Vr	15	V
Reverse current	Ir	5	mA
Forward current	If	50	mA
Soldering temperature (≤10s)	Stemp	260	°C

4. Electrical and optical characteristics (V_r=12V, T_c=+25°C, unless otherwise noted.)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Responsivity	R	CW, λ=1310nm, (*1)	0.8	0.9	—	A/W
		CW, λ=1550nm, (*1)	0.8	0.9	—	
Bandwidth	f _c	λ=1310nm, 3dB down, R _L =50Ω	2.5	—	—	GHz
		λ=1550nm, 3dB down, R _L =50Ω	2.5	—	—	
Second order inter-modulation distortion	IMD2	λ=1310nm, (*2)	—	—	-70	dBc
		λ=1550nm, (*2)	—	—	-70	
Third order inter-modulation distortion	IMD3	λ=1310nm, (*2)	—	—	-80	dBc
		λ=1550nm, (*2)	—	—	-80	
Dark current	I _d	V _r =5V	—	—	1	nA
		V _r =5V, T _c =85°C	—	—	100	
Total capacitance	C _p	V _r =5V, f=1MHz, (*3)	—	0.6	0.8	pF
Polarisation dependency	P _{sr}	CW, λ=1310nm	-0.1	—	+0.1	dB
		CW, λ=1550nm	-0.1	—	+0.1	
Optical return loss	ORL	λ=1310nm	—	—	-40	dB
		λ=1550nm	—	—	-40	
Active diameter	φ	—	—	60	—	μm

Note: *1. Measured with the standard equipment of SEI.

- *2. Two tone two laser test (373.25MHz, 451.25MHz), OMI=40%, 0.5mW per laser,
 Load impedance for PIN diode=230Ω (insert 180Ω in front of 50Ω-transmission line)
 IMD2: 373.25MHz+451.25MHz
 IMD3: 2x451.25MHz-373.25MHz

*3. Measured at anode-cathode, case open and not grounded.

5. Fiber pigtail specification

Parameter	Min.	Typ.	Max.	Unit
Type	Single Mode			—
Mode field diameter@1310nm	8.5	9.5	10.5	μm
Cladding diameter	122	125	128	μm
Outer jacket diameter	0.8	0.9	1.0	mm
Bending radius	30	—	—	mm

6. Ordering information

Part number	Pin assignment	Connector type	Flange type (hole pitch)	Old Part number	RoHS compliance of old part number
SPV3213-CJ/RH1	Type A	SC/PC	Horizontal type I (12.7mm)	SPV3213-CJ	Not Compliant (*5)
SPV3213-CN/RH1			Flangeless	SPV3213-CN	
SPV3213-QJ/RH1		SC/Angled-PC	Horizontal type I (12.7mm)	SPV3213-QJ	
SPV3213-QN/RH1			Flangeless	SPV3213-QN	
SPV3213-XJ		No connector	Horizontal type I (12.7mm)	SPV3213-XJ	Compliant
SPV3213-XN			Flangeless	SPV3213-XN	
SPV3215-CJ/RH1	Type B	SC/PC	Horizontal type I (12.7mm)	SPV3215-CJ	Not Compliant (*5)
SPV3215-CN/RH1			Flangeless	SPV3215-CN	
SPV3215-QJ/RH1		SC/Angled-PC	Horizontal type I (12.7mm)	SPV3215-QJ	
SPV3215-QN/RH1			Flangeless	SPV3215-QN	
SPV3215-XJ		No connector	Horizontal type I (12.7mm)	SPV3215-XJ	Compliant
SPV3215-XN			Flangeless	SPV3215-XN	

Note:*5. Some products in this category have been already RoHS compliant.

If any query, please contact us with part number and serial number.

7. Precaution

- (1) The modules should be handled in the same manner as ordinary semiconductor devices to prevent the electro-static damages. For safe keeping and carrying, the modules should be packaged with ESD proof material. To assemble the modules on PCB, the workbench, the soldering iron and the human body should be grounded.
- (2) The stress to the fiber pigtail may cause the damage on the performance. The fiber pigtail may snap off by dropping the module.
- (3) Please pay special attention to the atmosphere condition because the dew on the module may cause some electrical damages.
- (4) Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

8. RoHS Compliancy

On January 27, 2003, the European Parliament and the Council of the European Union issued the directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS).

Member States shall ensure that, from July 1, 2006, new electrical and electronic equipment put on the market does not contain lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

Applications listed in the Annex are exempted.

This product is compliant with RoHS 6/6 directive with exemptions "Lead in glass of cathode ray tubes, electronic components and fluorescent tubes" and "Lead as an alloying element in steel containing up to 0.35 % lead by weight, aluminium containing up to 0.4 % lead by weight and as a copper alloy containing up to 4 % lead by weight".

Appendix

Part No.: SP\ SPV321□□/ □□□


(Customize code)

Code	Connector type	Code	Flange type	Code	Pin assignment	Pin No.	Pin function for typeA and typeB
C	SC/PC	J	Horizontal (Type I)	3	Type A	1	(CASE)
D	FC/PC	K	Horizontal (Type II)	5	Type B	2	PD cathode
P	FC/Angled PC	N	Flangeless			3	PD anode
Q	SC/Angled PC	X	(Customize)				
X	No connector						

Connector type

Flange type

Pin assignment

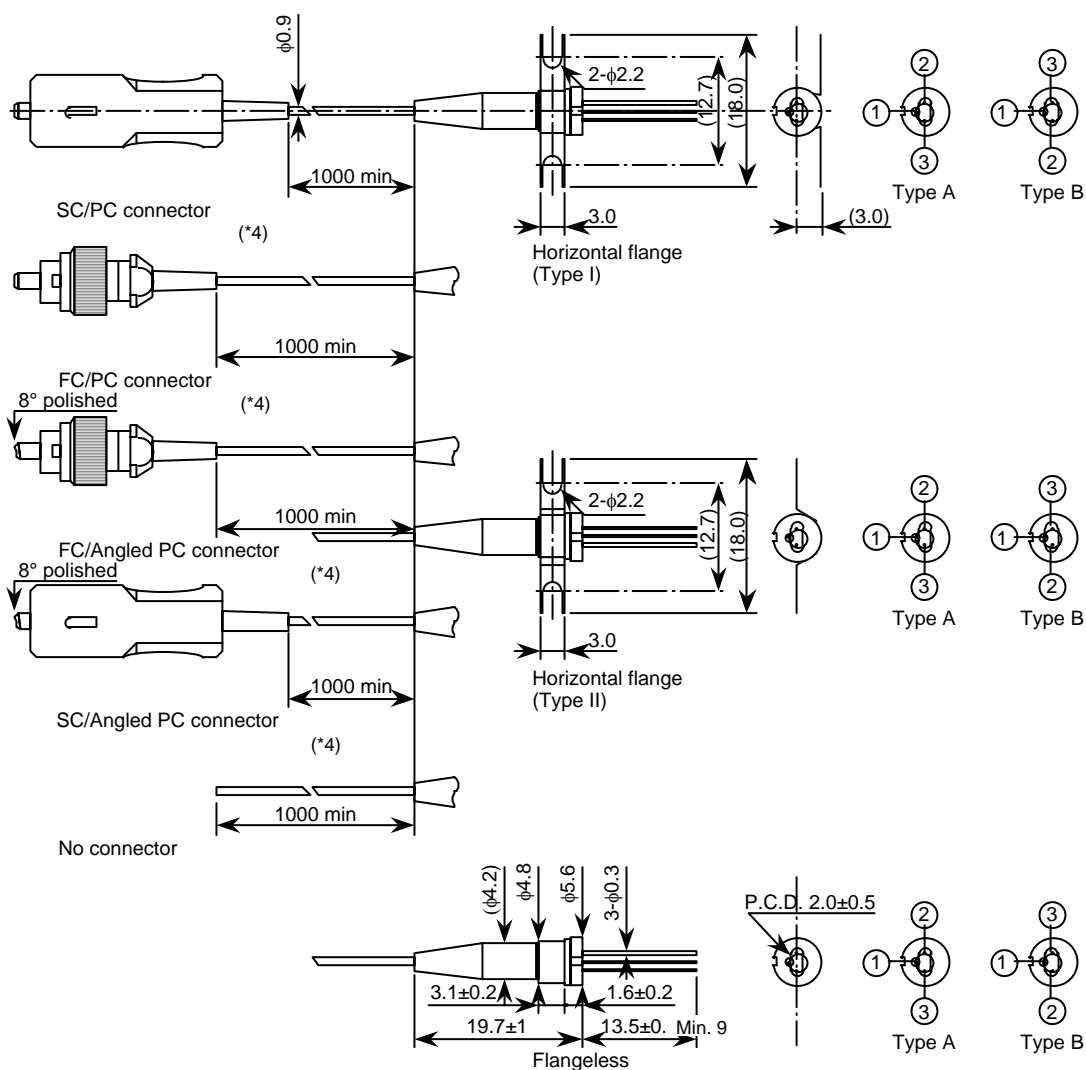

Unit: mm

Tolerance: ± 0.1 mm, unless otherwise noted.

Note:*4. IEC and JIS compliant. Detailed design not specified in the IEC and JIS standards is a subject to change without notice.

9. For More Information

U.S.A.

ExceLight Communications.

4021 Stirrup Creek Drive, Suite 200, Durham NC, 27703

U.S.A.

Tel. (919) 361-1600

Fax. (919) 361-1619

E-mail: info@excelight.com

URL: <http://www.excelight.com>

Europe

Sumitomo Electric Europe Ltd.

220 Centennial Park, Centennial Avenue, Elstree, Herts, WD6 3SL

United Kingdom

Tel. (020) 8953-8118

Fax. (020) 8207-5950

URL: <http://www.sumielectric.com>

Japan

Sumitomo Electric Industries, Ltd. (Opto-electronic Products Sales Div.)

3-12, Moto-Akasaka 1-chome, Minato-ku Tokyo, 107-8468

Japan

Tel. (03) 3423-5031

Fax. (03) 3423-5247

E-mail: product_info@ppd.sei.co.jp

URL: http://www.sei.co.jp/Electro-optic/index_e.html

Sumitomo Electric Industries, Ltd.

Part No.: SPV3210 Series

Document No.: HUW0424106-01C

Date of issue: February 29, 2008

Revision Record

Document No.	Date of issue	Description	Incorporated by	Checked by	Approved by
HUW0424106-01A	Sep./29/04	Preliminary Issue.	Y. Yamasaki	M. Furumai T. Kounosu	M. Yoshimura
HUW0424106-01B	Aug./09/06	Added RoHS compliancy.	T. Kounosu	N. Fukushima Y. Yamasaki	M. Yoshimura
HUW0424106-01C	Feb./29/08	Changed wording of the RoHS Compliancy.	N. Fukushima	T. Takagi K. Mii	H. Michikoshi