



Technical Specification  
of  
1.625 $\mu$ m MQW-DFB Laser Diode Module  
for Supervisory Channel up to 622Mb/s transmission

SLT4460-xx/RH2-S460 Series

RoHS Compliant



### 1. General

SLT4460-xx/RH2-S460 Series are 1.625 $\mu$ m InGaAsP/InP MQW-DFB laser diode modules designed for fiber optic communication systems. These modules are ideally suitable for long reach and intermediate reach of up to 622Mb/s transmission applications.

A laser diode is mounted into a coaxial package integrated with an InGaAs monitor PD and a single mode fiber pigtail.

Especially SLT4460-xx/RH2-S460 Series have a single stage isolator integrated inside. The lead content of this isolator is less than 1000ppm.

### 2. Package dimension and pin assignment

(See attached appendix.)

### 3. Absolute maximum ratings

Parameter	Symbol	Ratings	Unit
Storage temperature	Tstg	-40~+85	°C
Operating case temperature	Top	-20~+70	°C
Fiber output power	Pf	2	mW
Forward current (LD)	IfL	150	mA
Reverse voltage (LD)	VrL	2	V
Reverse voltage (PD)	VrP	15	V
Reverse current (PD)	IrP	2	mA
Soldering temperature (<10s)	Stemp	260	°C

4. Electrical and optical characteristics (Pf=2mW, Tc=25°C, unless otherwise noted.)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Threshold current	Ith	CW	—	10	20	mA
		CW, Tc=-20~+70°C	—	—	50	
Optical output power	Pf	CW, If=Ith+20mA	1.0	2	2.5	mW
		CW, If=Ith+20mA, Tc=-20~+70°C	0.5	—	4.0	
Operating voltage	Vf	CW, Tc=-20~+70°C	—	—	1.7	V
Slope efficiency	Se	CW, Average(Ith to Ith+20mA)	0.050	—	0.125	mW/mA
		CW, Average(Ith to Ith+20mA) Tc=-20~+70°C	0.025	—	0.200	
Peak wavelength	$\lambda_p$	CW	1620	1625	1630	nm
		CW, Tc=-20~+70°C	1613	—	1637	
Side-mode suppression ratio	SSR	CW, Tc=-20~+70°C	30	—	—	dB
Tracking error	$\Delta Pf$	Im hold(@Pf=2mW(25°C)), CW Tc=-20~+70°C	-1.0	—	1.0	dB
Rise time	tr	Ib=Ith, 20-80%, Tc=-20~+70°C	—	0.05	0.10	ns
Fall time	tf	Ib=Ith, 80-20%, Tc=-20~+70°C	—	0.10	0.15	ns
Extinction ratio	Er	10log(2mW/Pf(Ith)), Tc=-20~+70°C	10	—	—	dB
Monitor current	Im	CW, VrP=5V, Tc=-20~+70°C	50	—	1500	$\mu$ A
Monitor dark current	Id	VrP=5V	—	1	10	nA
Monitor capacitance	C	VrP=5V, f=1MHz	—	—	10	pF

5. Fiber pigtail specification

Parameter	Min.	Typ.	Max.	Unit
Type	Single Mode			—
Mode field diameter@1310nm	8.5	9.5	10.5	$\mu$ m
Cladding diameter	122	125	128	$\mu$ m
Outer jacket diameter	0.8	0.9	1.0	mm
Bending radius	30	—	—	mm

## 6. Ordering Information

Part number	Pin assignment	Optical isolator	Connector type	Flange type (hole pitch)
SLT4460-CN/RH2-S460	Type A	Single stage isolator	SC/PC	Flangeless
SLT4460-CP/RH2-S460				Vertical (12mm)
SLT4460-CS/RH2-S460				Horizontal (12.7mm)
SLT4460-XN/RH2-S460			No connector	Flangeless
SLT4460-XP/RH2-S460				Vertical (12mm)
SLT4460-XS/RH2-S460				Horizontal (12.7mm)

## 7. Precaution

- (1) Radiation emitted by laser devices can be dangerous to the eyes. Avoid eye or skin exposure to direct or scattered radiation.
- (2) The modules should be handled in the same manner as ordinary semiconductor devices to prevent the electro-static damages. For safe keeping and carrying, the modules should be packaged with ESD proof material. To assemble the modules on PCB, the workbench, the soldering iron and the human body should be grounded.
- (3) The stress to the fiber pigtail may cause the damage on the performance. The fiber pigtail may snap off by dropping the module.
- (4) Please pay special attention to the atmosphere condition because the dew on the module may cause some electrical damages.
- (5) Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

## 8. RoHS Compliancy

On January 27, 2003, the European Parliament and the Council of the European Union issued the directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS).

Member States shall ensure that, from July 1, 2006, new electrical and electronic equipment put on the market does not contain lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

Applications listed in the Annex are exempted.

This product is compliant with RoHS 6/6 directive with exemptions "Lead in glass of cathode ray tubes, electronic components and fluorescent tubes" and "Lead as an alloying element in steel containing up to 0.35 % lead by weight, aluminium containing up to 0.4 % lead by weight and as a copper alloy containing up to 4 % lead by weight".

9. Appendix

Part No.: SLT446□-□□ / □□□-S460

(RH2 or Customize Code)

Code	Connector type
C	SC/PC
D	FC/PC
L	LC/PC
M	MU/PC
Q	SC/Angled PC
X	No connector

Connector type

Code	Flange type
N	Flangeless
P	Vertical (12.0mm)
S	Horizontal (12.7mm)


Flange type

Code	Pin assignment
0	Type A
6	Type C

Pin assignment

Pin No.	Pin function for type A
1	LD anode (CASE)
2	LD cathode
3	PD cathode
4	PD anode

Pin No.	Pin function for type C
1	(CASE)
2	LD cathode
3	PD anode
4	LD anode/ PD cathode

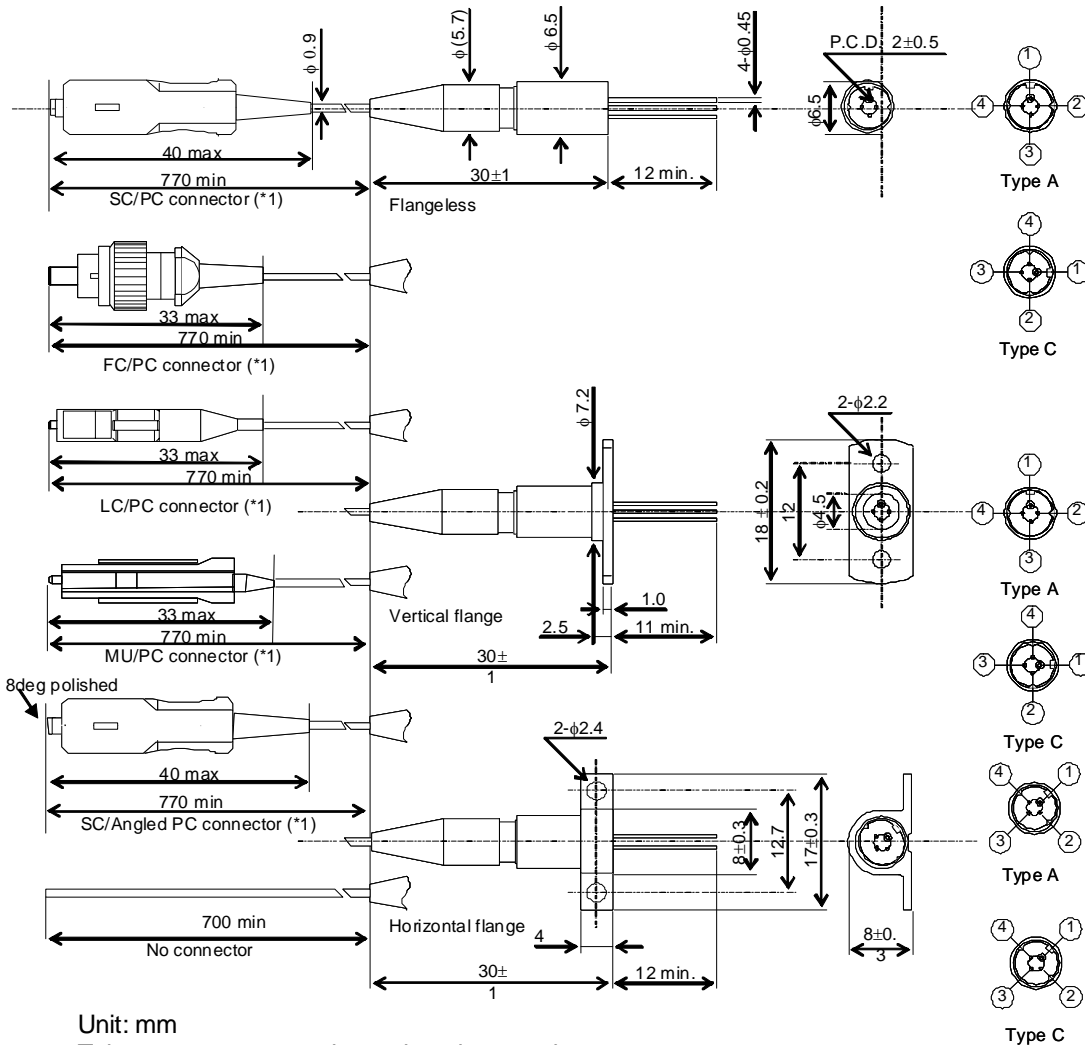

Unit: mm

Tolerance:  $\pm 0.1$  mm, unless otherwise noted.

Note: \*1. IEC and JIS compliant. Detailed design not specified in the IEC and JIS standards is a subject to change without notice.

## 10. For More Information

### U.S.A.

ExceLight Communications Inc.

4021 Stirrup Creek Drive, Suite 200, Durham NC, 27703

U.S.A.

Tel. (919) 361-1600

Fax. (919) 361-1619

E-mail: [info@excelight.com](mailto:info@excelight.com)

URL: <http://www.excelight.com>

### Europe

Sumitomo Electric Europe Ltd.

220 Centennial Park, Centennial Avenue, Elstree, Herts, WD6 3SL

United Kingdom

Tel. (020) 8953-8118

Fax. (020) 8207-5950

URL: <http://www.sumielectric.com>

### Japan

Sumitomo Electric Industries, Ltd. (Opto-electronic Products Sales Div.)

3-12, Moto-Akasaka 1-chome, Minato-ku Tokyo, 107-8468

Japan

Tel. (03) 3423-5031

Fax. (03) 3423-5247

E-mail: [product\\_info@ppd.sei.co.jp](mailto:product_info@ppd.sei.co.jp)

URL: [http://www.sei.co.jp/Electro-optic/index\\_e.html](http://www.sei.co.jp/Electro-optic/index_e.html)

Revision Record

Document No.	Date of issue	Description	Incorporated by	Checked by	Approved by
HUW0724132-01A	Feb./01/08	Initial issue.	T. Takagi	N. Fukushima Y. Yamasaki	H. Michikoshi
HUW0724132-01B	May/07/09	Added connector options; LC/PC, MU/PC and SC/APC.	A. Hamakawa	M. Ito T. Kounosu	H. Michikoshi